



FOR A BETTER LIFE

HANMIX is not only a brand name, but a way

FOR A BETTER LIFE

You can find ultimate safety and high quality living
in the HANMIX World.

WHY HANMIX

40 YEARS OF EXPERTISE

Our management brings four decades of experience in the tire and accessories industry, ensuring reliable and knowledgeable support.

COMPREHENSIVE PRODUCT RANGE

We supply a full line of tires – from bicycles to trucks, OTR, agricultural, industrial, and solid tires – along with essential accessories.

QUALITY BUILT ON TRUST

We deliver reliable, robust, and durable products, Certificate by DOT, ECE, ISO, GCC, SASO, etc. We strictly control our quality from raw material sourcing to finished product inspection.

DEDICATED SERVICE & SUPPORT

We partner with our clients, offering tailored marketing support, strong after-sales service, and customized solutions to help you succeed in your market.

→ [PRODUCT PARAMETER MANUAL](#)



CLASSIC CL13



GRANDRANK HX07



GRANDRANK HX23



CLASSIC CL27



CLASSIC CL08



GRANDRANK HX03



CLASSIC CL14



CLASSIC CL17



CLASSIC CL19



CLASSIC CL15



CLASSIC CL06



CLASSIC CL18



CLASSIC CL05



CLASSIC CL20



CLASSIC CL16



GRANDRANK LT2



CLASSIC CL23



CLASSIC CL04




CLASSIC CL21



MIX-200



CLASSIC CL02

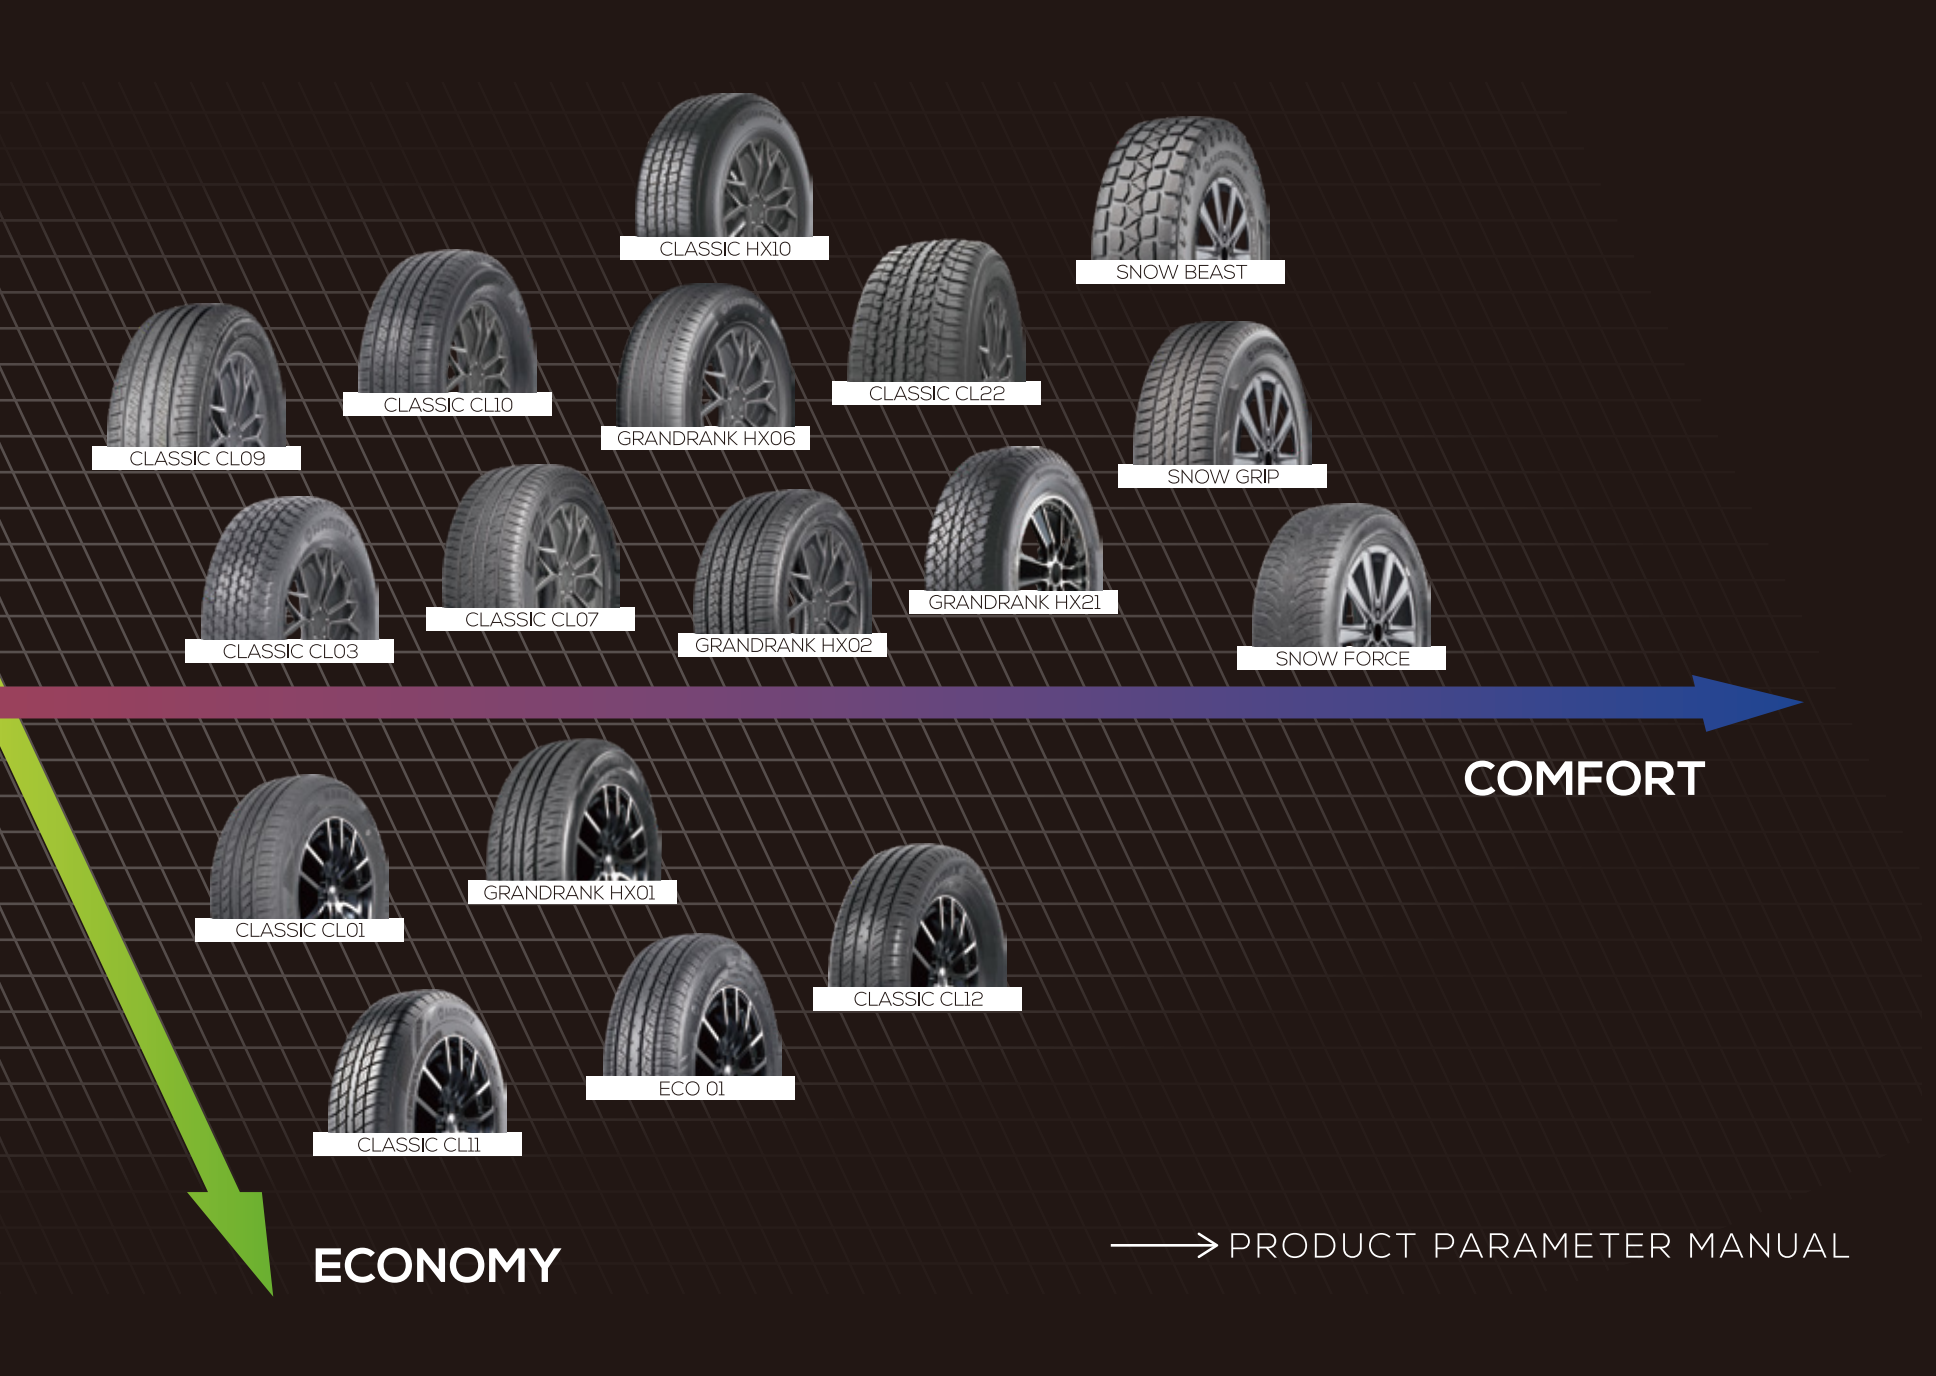

CLASSIC HX10

SNOW BEAST

CLASSIC CL10

CLASSIC CL22

GRANDRANK HX06

SNOW GRIP

CLASSIC CL09

CLASSIC CL07

GRANDRANK HX21

CLASSIC CL03

GRANDRANK HX02

SNOW FORCE

COMFORT

CLASSIC CL01

GRANDRANK HX01

CLASSIC CL12

ECO 01

CLASSIC CL11

ECONOMY

→ PRODUCT PARAMETER MANUAL

CONTENTS

01	UHP
GRANDRANK HX03	08
GRANDRANK HX07	10
CLASSIC CL08	25
CLASSIC CL13	33

02	HP
ECO 01	03
GRANDRANK HX01	06
CLASSIC CL01	16
CLASSIC CL11	30
CLASSIC CL12	31

03	HT
GRANDRANK HX02	07
GRANDRANK HX06	09
GRANDRANK HX21	12
CLASSIC CL03	20
CLASSIC CL07	24
CLASSIC CL09	27
CLASSIC CL10	28
CLASSIC HX10	29
CLASSIC CL22	44

04	AT
GRANDRANK HX23	13
CLASSIC CL14	35

05	MT
CLASSIC CL17	39

06	RT
CLASSIC CL27	46

07	LT
GRANDRANK LT2	11
CLASSIC CL02	18
CLASSIC CL04	21
CLASSIC CL05	22
CLASSIC CL06	23
CLASSIC CL15	37
CLASSIC CL16	38
CLASSIC CL18	40
CLASSIC CL19	41
CLASSIC CL20	42
CLASSIC CL21	43
CLASSIC CL23	45
MIX-200	48

08	SNOW
SNOW FORCE	50
SNOW GRIP	53
SNOW BEAST	54



ECO SERIES TIRE

02

← PRODUCT PARAMETER MANUAL



ECO 01 HP TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet




Widened shoulder tread design increases contacting area, providing better driving stability and reliability.

Continuous straight center rib design provides optimized ground contact area, guarantees better driving safety.

Excellent grip and handling performance on wet land.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
175/70R12 WSW	80T	5J	511	177	450
185/65R13 WSW	80H	5½J	552	189	450
225/70R15 WSW	100H	6½J	697	228	800

ECO 01

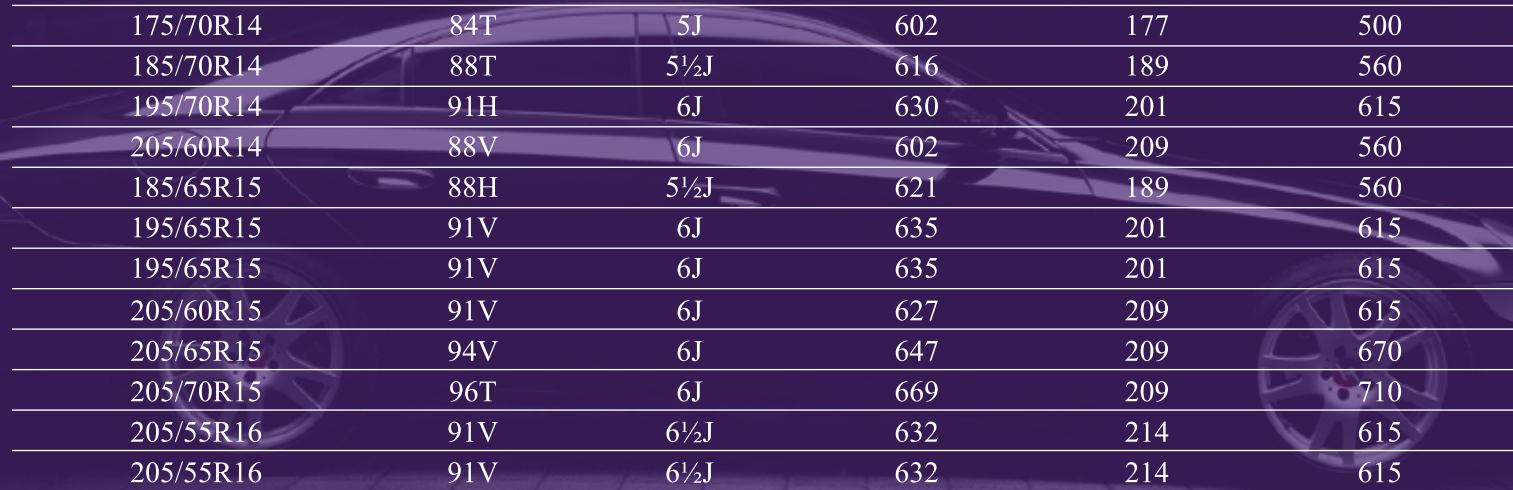

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
165/60R13	73H	5J	528	170	365
165/65R13	77T	5J	544	170	412
175/60R13	77T	5J	540	177	475
175/70R13	82T	5J	576	177	475
175/65R14	82H	5J	584	177	475
175/70R14	84H	5J	602	177	500
175/70R14	84T	5J	602	177	500
185/70R14	88T	5½J	616	189	560
195/70R14	91H	6J	630	201	615
205/60R14	88V	6J	602	209	560
185/65R15	88H	5½J	621	189	560
195/65R15	91V	6J	635	201	615
195/65R15	91V	6J	635	201	615
205/60R15	91V	6J	627	209	615
205/65R15	94V	6J	647	209	670
205/70R15	96T	6J	669	209	710
205/55R16	91V	6½J	632	214	615
205/55R16	91V	6½J	632	214	615
215/60R16	95H	6½J	664	221	690
215/60R16	95V	6½J	664	221	690
205/65R16	95H	6J	672	209	690
215/65R16	98H	6½J	686	221	750
215/55R17	98W XL	7J	668	226	750

GRANDRANK SERIES TIRE

05

PRODUCT PARAMETER MANUAL →



GRANDRANK HX01

HP TIRE

Applicable Models  



Criss-cross grooves design enhances water evacuation, effectively prevent tire lateral slip on wet road.

Central rib combined with horizontal grooves provides nice stability, excellent acceleration and brake performance at high speed.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
215/65R16	98H	6½J	686	221	750
215/70R16	100H	6½J	708	221	800



GRANDRANK HX02

HT TIRE



Four wide grooves design provides effective drainage and sufficient wet safety performance.

Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land.

The compact shoulder design provides excellent handling performance with low noise.

Multiple blade groove pattern provides excellent grip and handling performance on wet land.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
225/65R17	106H	6½J	724	228	950
235/55R17	103V	7½J	690	245	875
245/65R17	111H	7J	750	248	1090
235/55R18	104V	7½J	715	245	900
265/65R18	114H	8J	801	272	1180

GRANDRANK HX03

UHP TIRE

Applicable Models  



Smooth asymmetric pattern, ensuring better controlling performance of outside while enhancing drainage of inside. Four wide deep grooves keep excellent wetting performance and handling stability.

Outside shoulder reinforcement improving handling performance at curve, effectively preventing abnormal wear.

Bended steel groove, effectively reducing the noise while enlarging ground contact area.

Size	L/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
225/60R17	103V	6½J	702	228	875
245/45ZR20	103W	8J	728	243	875



GRANDRANK HX06

HT TIRE

Applicable Models  

Comfort

Braking

Noise

Wear

Dry

Wet

Closed Shoulder: Reduces noise by limiting air flow.

Multi-Pitch Sequencing: Minimizes tire noise for a quiet ride.

Enhanced Contact Patch: Promotes even wear and longer life.

Advanced Tread Compound: Improves wet grip for safer rain driving.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
215/60R17	96H	6.5	690	221	710
225/60R17	99V	6.5	702	228	775
225/65R17	102H	6.5	724	228	850
235/65R17	108V XL	7.0	738	240	1000
215/55R18	95V/99V XL	7.0	693	226	690/775
225/55R18	98V/102V XL	7.0	705	233	750/850
235/50ZR18	101W XL	7.5	693	245	825
235/55R18	100V/104V XL	7.5	715	245	800/900
235/60R18	107VXL	7.0	739	240	975
235/55ZR19	105WXL	7.5	741	245	925
245/55ZR19	107WXL	7.5	753	253	975

GRANDRANK HX07

UHP TIRE

Applicable Models  



Asymmetric pattern design provides excellent grip on curves, ensuring stability during driving and offering excellent water drainage performance.

Optimized pitch width and arrangement and pitch displacement design effectively reduce noise during driving.

Size	L/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
215/50R17	91V	7J	648	226	615
215/55ZR17	98W XL	7J	668	226	750
225/50ZR17	98W XL	7J	658	233	750
225/55ZR17	101W XL	7J	680	233	825
235/55R17	99V	7½J	690	245	775
225/45ZR18	95W XL	7½J	659	225	690
245/45ZR18	100W XL	8J	667	243	800
245/45ZR19	98W	8J	703	243	750
255/45ZR19	104W XL	8½J	713	255	900
245/45ZR20	103W XL	8J	728	243	875



GRANDRANK LT2

LT TIRE

Applicable Models



Comfort

Braking

Noise

Wear

Dry

Wet

The use of straight longitudinal grooves improve the drainage of the tire, thereby improving the waterproof and drift performance.

Super wear-resistant formula, providing excellent durability and wear resistance.

Continuous shoulder design improves wear and tear resistance.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
195R14C WSW	8	106/104P	5½J	666	198	950/900
205R14C WSW	8	109/107N	6J	686	208	1030/975
205/70R15C WSW	8	106/104Q	6J	669	209	950/900
215/70R15C WSW	8	109/107R	6½J	683	221	1030/975
225/70R15C WSW	8	112/110R	6½J	697	228	1120/1060

GRANDRANK HX21

HT TIRE

Applicable Models 



Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land.

The compact shoulder design provides excellent handling performance with low noise.

Multiple blade groove pattern provide excellent grip and handling performance on wet land.


Four wide grooves design provide effective drainage and sufficient wet safety performance.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
265/70R17	115T	8J	804	272	1215
265/60R18	110H	8J	775	272	1060
285/50R20	116V XL	9J	794	297	1250



GRANDRANK HX23

AT TIRE

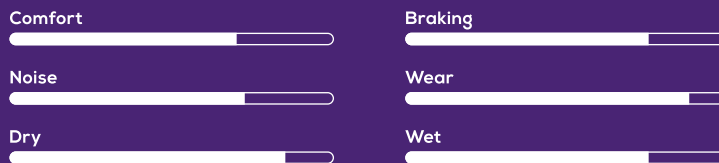

Robust sidewall design.

Advanced tread design for longer wear.

Aggressive all-terrain traction on and off-road.

Staggered shoulder blocks for greater maneuverability in soft soil.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
235/60R15	98T	7J	663	240	750
215/65R16	96T	6½J	686	221	710

GRANDRANK HX23

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
LT235/70R16	8	110/107Q	7J	736	240	1060/975
LT245/70R16	10	118/115Q	7J	750	248	1320/1215
LT265/70R16	10	121/118S	8J	778	272	1450/1320
LT245/70R17	10	119/116R	7J	776	248	1360/1250
LT265/65R17	10	120/117S	8J	776	272	1400/1285
LT265/70R17	10	121/118S	8J	804	272	1450/1320
LT315/70R17	10	121/118S	9½J	874	323	1450/1320
LT265/60R18	10	119/116S	8J	775	272	1360/1250
LT265/70R18	10	124/121Q	8J	829	272	1600/1450
LT275/65R18	10	123/120S	8J	815	279	1550/1400
LT285/60R18	10	122/119S	8½J	799	292	1500/1360
LT275/55R20	10	120/117S	8½J	810	284	1400/1285
LT285/45R22	10	116/113S	9½J	815	285	1250/1150
LT275/50R22	10	119/116S	8½J	835	284	1360/1250

CLASSIC SERIES TIRE



15

PRODUCT PARAMETER MANUAL →

CLASSIC CLO1

HP TIRE

Applicable Models  



Energy-saving and comfortable driving.
 Excellent the hydroplaning and wet performance.
 Good handling and comfort performance.
 Low noise and high tread wear.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
155/65R13	73T	4.50B	532	157	365
165/65R13	77T	5.00B	544	170	412
175/60R13	77T	5.00B	540	177	412
175/70R13	82T	5.00B	576	177	475
185/70R13	86T	5.50B	590	189	530

CLASSIC CLO1

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
175/65R14	82H	5J	584	177	475
175/70R14	84T	5J	602	177	500
185/60R14	82H	5½J	578	189	475
185/65R14	86H	5½J	596	189	530
185/70R14	88T	5½J	616	189	560
195/60R14	86H	6J	590	201	530
195/70R14	91T	6J	630	201	615
205/60R14	88H	6J	602	209	560
175/50R15	75H	5½J	557	182	387
185/55R15	82H	6J	585	194	475
185/65R15	88H	5½J	621	189	560
195/50R15	82H	6J	577	201	475
195/55R15	85H	6J	595	201	515
195/60R15	88H	6J	615	201	560
195/65R15	91H	6J	635	201	615
205/60R15	91H	6J	627	209	615
205/65R15	94H	6J	647	209	670
205/55R16	91H	6½J	632	214	615
205/60R16	92V	6J	652	209	630
215/60R16	95V/H	6½J	664	221	690

CLASSIC CL02

LT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Enhanced grip on off-road surface.
 Excellent water dispersion and hydroplaning resistance.
 Improved heat dissipation and grip performance.
 Quiet driving performance at high speed.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
155R12LT	6	83/81N	4.50B	553	157	487/462
155R12C	6	83/81N	4.50B	553	157	487/462
155R12LT	8	88/86N	4.50B	553	157	560/530
155R12C	8	88/86N	4.50B	553	157	560/530
155R13LT	8	90/88N	4.50B	578	160	600/560
155R13C	8	90/88N	4.50B	578	160	600/560
165R13LT	8	94/93Q	4.50B	594	165	670/650
165R13C	8	94/93Q	4.50B	594	165	670/650
165R14C	8	97/95Q	4½J	620	165	730/690

CLASSIC CL02

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
165R14LT	8	97/95Q	4½J	620	165	730/690
175R13LT	8	97/95Q	5.00B	610	177	730/690
175R13C	8	97/95Q	5.00B	610	177	730/690
175R14C	8	99/98Q	5J	636	177	775/750
175R14LT	8	99/98Q	5J	636	177	775/750
185R14LT	8	102/100Q	5½J	652	189	850/800
185R14C	8	102/100Q	5½J	652	189	850/800
195R14LT	8	105/103Q	5½J	668	196	925/875
195R14C	8	106/104Q	5½J	668	196	950/900
205R14LT	8	107/105R	6J	684	208	975/925
205R14C	8	109/107R	6J	684	208	1030/975
215R14LT	8	110/108R	6J	700	218	1060/1000
215R14C	8	112/110R	6J	700	218	1120/1060
215/75R14LT	8	104/101Q	6J	678	216	900/825
215/75R14C	8	112/110Q	6J	678	216	1120/1060
185R15LT	8	103/102S	5½J	677	189	875/850
185R15C	8	103/102S	5½J	677	189	875/850
195R15LT	8	106/104Q	5½J	693	196	950/900
195R15C	8	106/104Q	5½J	693	196	950/900
195/70R15LT	8	99/96R	6J	655	201	775/710
195/70R15C	8	104/102R	6J	655	201	900/850
205/70R15C	8	106/104R	6J	669	209	950/900
215/70R15C	8	109/107R	6½J	683	221	1030/975
225/70R15LT	8	106/103R	6½J	697	228	950/875
225/70R15C	8	112/110R	6½J	697	228	1120/1060
215/75R16C	8	113/111R	6J	728	216	1150/1090
225/65R16C	8	112/110R	6½J	698	228	1120/1060
235/65R16C	8	115/113R	7J	712	240	1215/1150

CLASSIC CL03

HT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Improved grip and traction, sufficiently reduces braking distance under dry or wet.
 Good ability to break water surface tension and reduces sliding on wet.
 Great resistance to impact and load capability.
 Low noise during driving.

Size	LI/SS	Std. Rim	OD (mm)	SW mm)	Load (kg)
205R16C 8PR	110/108R	6J	736	208	1060/1000
205R16LT 8PR	110/108R	6J	736	208	1060/1000
255/70R15C 6PR	112/110S	7½J	739	260	1120/1060
255/70R15LT 6PR	112/110S	7½J	739	260	1120/1060
255/70R15C 8PR	113/110S	7½J	739	260	1150/1060
265/70R16	112T	8J	778	272	1120
275/70R16	114T	8J	792	279	1180
265/65R17	112S	8J	776	272	1120
275/65R17	115T	8J	790	279	1215
265/70R17	115T	8J	804	272	1215
265/60R18	110H	8J	775	272	1060
285/60R18	116T	8½J	799	292	1250



CLASSIC CL04

LT TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet



Good straight line stability and steering performance.

Great loading capability.

Good drainage and safety performance on wet road.

More quiet driving experience.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
7.50R16LT	8	114/112S	6.00G	805	215	1180/1120
7.50R16LT	10	116/111S	6.00G	805	215	1250/1090
225/95R16C	8	118/116Q	6J	834	223	1320

CLASSIC CL05

LT TIRE

Applicable Models 



Good load-bearing capacity.

Long life and exceptional irregular wear resistance.

Unique tread compound that offers superior cut and chip resistance.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load(kg)
7.50R16C	8	114/112S	6.00G	805	215	1180



CLASSIC CL06

LT TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet



Excellent high speed road durability and stability.

Straight rib pattern ensures firm grip on soft sand.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
225/95R16C	10	122/118Q	6J	834	223	1500
225/95R16C	8	118/116Q	6J	834	223	1320
245/85R16	-	114S	7J	822	248	1180

CLASSIC CL07

HT TIRE

Applicable Models  



- Comfort, quiet and durability performance.
- Excellent the hydroplaning and wet performance.
- Good steering and stability at high speed.
- Excellent ride and low noise performance.
- Stiff tread and uniform wear.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
265/65R18	114H	8J	801	272	1180
275/65R18	116H	8J	815	279	1250
285/50R20	116V XL	9J	794	297	1250



CLASSCI CL08

UHP TIRE



Excellent grip ensures the stability of straight and curved in wet terrain.

Strong block effectively enhances side cornering traction.

Rapid drainage performance in wet terrain.

Optimized pattern design reduces tire noise and improves vehicle safety.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
205/50R15	86V	6½J	587	214	530
205/55R15	88V	6½J	607	214	560
225/60R15	96V	6½J	651	228	710
195/55R16	91V XL	6J	620	201	615
195/60R16	89H	6J	640	201	580
205/55R16	91V	6½J	632	214	615

CLASSIC CL08

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
205/60R16	92V	6J	652	209	630
205/65R16	95H	6J	672	209	690
215/55ZR16	93W	7J	642	226	650
215/60R16	95V	6½J	664	221	690
215/65R16	98H	6½J	686	221	750
225/60R16	98H	6½J	676	228	750
235/60R16	100H	7J	688	240	800
205/40ZR17	84W XL	7½J	596	212	500
205/45ZR17	88W XL	7J	616	206	560
215/45ZR17	91W XL	7J	626	213	615
215/50ZR17	95W XL	7J	648	226	690
215/55ZR17	94W	7J	668	226	750
225/45ZR17	94W XL	7½J	634	225	670
225/50ZR17	98W XL	7J	658	233	750
225/55R17	97V	7J	680	233	730
225/45ZR18	95W XL	7½J	659	225	690
245/45ZR18	100W XL	8J	677	243	800



CLASSIC CL09

HT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Good straight, curved high-speed stability and wetland drainage performance.
Optimized pattern design enhances the lateral grip and improves vehicle safety.
Low driving noise ensures a quieter driving environment.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
215/70R16	100H	6½J	708	221	800
235/70R16	106H	7J	736	240	950
275/70R16	114H/T	8J	792	279	1180
215/60R17	96H	6½J	690	221	710
225/60R17	99H	6½J	702	228	775
225/65R17	102H	6½J	724	228	850
235/65R17	104H	7J	738	240	900
265/65R17	112H	8J	776	272	1120
235/60R18	107V XL	7J	739	240	975

CLASSIC CL10

HT TIRE

Applicable Models  



Good straight, curved high-speed stability and wetland drainage performance. Optimized pattern design enhances the lateral grip and improves vehicle safety. Low driving noise ensures a quieter driving environment.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
225/70R16	103H	6½J	722	228	875
245/70R16	107H	7J	750	248	975
265/70R16	112H/T	8J	778	272	1120
245/65R17	107H	7J	750	248	975
265/70R17	115H/T	8J	804	272	1215
235/55R18	104V XL	7½J	715	245	900
265/60R18	110H	8J	775	272	1060
225/55R18	98V	7J	705	233	750
225/60R18	100V	6½J	727	228	800
245/60R18	105H	7J	751	248	925



CLASSIC HX10

HT TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet



Variable pitch and cross-designed sipes reduce vibration and noise, ensuring a quiet, comfortable ride.

Reinforced tread blocks increase stiffness for better handling and stability under various driving conditions.

4 main grooves with through-type lateral grooves enhance wet grip and drainage.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
245/75R17	112H	7J	800	248	1120
265/65R18	114H	8J	801	272	1180
285/65R18	116H	8½J	827	292	1250
265/55R20	113V	8½J	800	277	1150

CLASSIC CL11

HP TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Good quietness brings stable and comfortable driving experience.
 Excellent handling performance can respond sensitively to various corners.
 Deep grooves and outstanding tread compound for endurance and long-lasting use.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
135/70R12	65Q	4.00B	495	138	290
145/70R12	69T	4.50B	509	150	325
145/80R12	74T	4.00B	537	145	375
175/70R12	80T	5.00B	551	177	450
165/70R13	79T	5.00B	562	170	437
175/70R13	82T	5.00B	576	177	475
185/70R13	86T	5.50B	590	189	530
185/65R14	86T	5½J	596	189	530
185/70R14	88T	5½J	616	189	560
205/70R14	95T	6J	644	209	690



CLASSIC CL12

HP TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet



Good steering performance and ride comfort.

Excellent hydroplaning and wet performance.

Good stability on dry ground, great response and sensitivity of high speed.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
165/70R13LT	6	88/86S	5.00B	562	170	560/530
165/70R13C	6	88/86S	5.00B	562	170	560/530
175/70R14LT	6	95/93Q	5J	602	177	690/650
175/70R14C	6	95/93Q	5J	602	177	690/650

CLASSIC CL12

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
155/70R12	73T	4.50B	523	157	365
165/70R12	77T	5.00B	537	170	412
135/80R13	60L	4.00B	546	138	250
135/80R13	74N XL	4.00B	546	138	375
145/60R13	66N	4.50B	504	150	300
145/80R13	75T	4.00B	562	145	387
145/80R13	79N XL	4.00B	562	145	437
155/65R13	73T	4.50B	532	157	365
155/70R13	75T	4.50B	548	157	387
155/80R13	79T	4.50B	578	157	437
165/55R13	70N	5.00B	512	170	335
165/65R13	77T	5.00B	544	170	412
165/70R13	79T	5.00B	562	170	437
165/80R13	83T	4.50B	594	165	487
175/70R13	82T	5.00B	576	177	475
185/70R13	86T	5.00B	590	189	530
155/50R14	67T	5J	512	162	307
165/60R14	75H	5J	554	170	387
165/65R14	79H	5J	570	170	437

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
165/70R14	81T	5J	588	170	462
165/80R14	85T	4½J	620	165	515
175/65R14	82H	5J	584	177	475
175/70R14	84T	5J	602	177	500
185/60R14	82H	5½J	578	189	475
185/65R14	86H	5½J	596	189	530
185/70R14	88T	5½J	616	189	560
195/60R14	86H	6J	590	201	530
195/70R14	91T	6J	630	201	615
205/60R14	88H	6J	602	209	560
185/60R15	84H	5½J	603	189	500
185/65R15	88H	5½J	621	189	560
195/50R15	82H/V	6J	577	201	475
195/55R15	85H/V	6J	595	201	515
195/60R15	88H	6J	615	201	560
195/65R15	91H	6J	635	201	615
205/60R15	91H/V	6J	627	209	615
205/65R15	94H	6J	647	209	670
215/65R15	96H	6½J	661	221	710



CLASSIC CL13

UHP TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Excellent high speed handling.

Excellent hydroplaning performance.

Excellent ride and low noise driving experience.

Fuel economy, great wet grip and braking performance.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
205/45R16	87V XL	7J	590	206	545
205/50ZR17	93W XL	6½J	638	214	650
205/55ZR17	95W XL	6½J	658	214	690
235/55ZR17	103W XL	7½J	690	245	875
215/55R18	95V	7J	693	226	690

CLASSIC CL13

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
235/45ZR18	98W XL	8J	669	236	750
235/50ZR18	101W XL	7½J	693	245	825
225/45ZR19	96W XL	7½J	685	225	710
225/55ZR19	103W XL	7J	731	233	875
235/55R19	101W	7½J	741	233	825
245/40ZR19	98W	8½J	679	248	750
245/45ZR19	102W	8J	703	243	850
245/55ZR19	107W XL	7½J	753	253	975
245/45ZR20	103W	8J	728	243	875
245/50ZR20	105W XL	7½J	754	253	925



CLASSIC CL14

AT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Upgraded material offers good handling and ride comfort.
Two steel belts and plies enhance carcass strength.
Splice-free belt hoops ensure tire strength and driving safety.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
LT215/75R14	6	98/95S	6J	678	216	750/690
LT225/70R15	8	107/103S	6½J	697	228	975/875
31x10.50R15LT	6	109S	8½J	775	268	1030
31x10.50R15LT	10	114/111R	8½J	775	268	1180/1090
LT215/85R16	10	115/112R	6J	772	216	1215/1120
LT225/75R16	10	115/112R	6J	744	223	1215/1120
LT235/85R16	10	120/116R	6½J	806	235	1380/1260
LT245/70R16	10	120/116R	7J	750	248	1380/1260
LT245/75R16	10	120/116R	7J	774	248	1380/1260
LT265/70R16	10	121/118R	8J	778	272	1450/1320
LT265/70R16	10	123/120R	8J	778	272	1550/1400
LT265/75R16	10	123/120R	7½J	804	267	1550/1400
LT265/65R17	10	120/117R	8J	776	272	1400/1285

CLASSIC CL14

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
175/80R14	88T	5J	636	177	560
205/60R15	91H	6J	627	209	615
205/65R15	94H	6J	647	209	670
205/70R15	96T	6J	669	209	710
225/70R15	100T	6½J	697	228	800
205/60R16	92H	6J	652	209	630
215/65R16	98T	6½J	686	221	750
235/60R16	100T	7J	688	240	800
235/70R16	106T	7J	736	240	950
245/70R16	107T	7J	750	248	975
255/70R16	111T	7½J	764	260	1090
265/70R16	112T	8J	778	272	1120
225/65R17	102T	6½J	724	228	850
235/60R17	102T	7J	714	240	850
235/65R17	104T	7J	738	240	900
265/65R17	112T	8J	776	272	1120
265/70R17	115T	8J	804	272	1215



CLASSIC CL15

LT TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet



4 Main grooves & sipes ensure optimal grip on wet roads.

Good performance on rain, snow, mud, and non-paved roads.

Low rolling resistance compound offers excellent fuel economy.

Low noise and more driving comfort.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load(kg)
185/75R16C	8	104/102R	5J	684	184	900/850

CLASSIC CL16

LT TIRE

Applicable Models



Good high speed performance on complicated road surface.

Wavy groove design grips onto various road surfaces effectively.

Randomized groove distribution reduces noise.

Multiple tread block sizes improve traction and comfort.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
235/75R15C	6	104/101S	6½J	733	235	900/825
235/75R15LT	6	104/101S	6½J	733	235	900/825
235/75R15C	10	116/113S	6½J	733	235	1250/1150
235/75R15LT	10	116/113S	6½J	733	235	1250/1150



CLASSIC CL17

MT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Variable pitch design with large blocks improves grip and durability.

Reinforced shoulder blocks and 3D sidewall improve passability in harsh road.

Special tread compound tailored for MT application improves outstanding and tread wear.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
LT235/75R15	6	104/101Q	6½J	733	235	900/825
31X10.50R15LT	6	109Q	8½J	775	268	1030
LT235/85R16	10	120/116Q	6½J	806	235	1380/1260
LT245/75R16	10	120/116Q	7J	774	248	1380/1260
LT255/70R16	10	120/117Q	7½J	764	260	1400/1285
LT265/70R16	6	110/107Q	8J	778	272	1060/975
LT265/70R16	8	117/114Q	8J	778	272	1285/1180
LT265/75R16	10	123/120Q	7½J	804	267	1550/1400
LT265/65R17	10	120/117Q	8J	776	272	1400/1285
LT265/70R17	10	121/118Q	8J	804	272	1450/1320

CLASSIC CL18

LT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Strengthen structure design improves impact resistant and tire wear.

Staggered main blocks combined with small sipes fully improve braking performance.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
5.00R12LT	8	83/81Q	3.50B	568	143	487/462
5.00R12C	8	83/81Q	3.50B	568	143	487/462
5.00R12LT	10	88/86Q	3.50B	568	143	560/530
5.00R12C	10	88/86Q	3.50B	568	143	560/530



CLASSIC CL19

LT TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet



Wavy Grooves: Break water tension for superior wet handling.

Central Blocks: Engineered for a quieter ride.

3D Center Blocks & Grooves: Deliver maximum all-condition grip.

Stiff Shoulder Blocks: Resist deformation for even wear & longer life.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
185R14C	8	102/100Q	5½J	650	188	850/800
185R14LT	8	102/100Q	5½J	650	188	850/800
195R14C	8	106/104Q	5½J	666	198	950/900
195R15C	8	106/104Q	5½J	690	198	950/900

CLASSIC CL20

LT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



The interlaced tread pattern block on tire shoulder can promote the cross-country performance.

The three longitudinal grooves greatly enhance the drainage on wet road.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
185R14C	8	102/100Q	5½J	650	188	850/800
195R14C	8	106/104Q	5½J	666	198	950/900
205R14LT	8	107/105Q	6J	686	208	975/925
205R14C	8	109/107Q	6J	686	208	1030/975
215R14LT	8	110/108Q	6J	700	218	1060/1000
215R14C	8	112/110Q	6J	700	218	1120/1060
195R15C	8	106/104Q	5½J	693	196	950/900



CLASSIC CL21

LT TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet



Premium highway terrain tire designed for light truck.

Muti-pitch tread blocks minimize pattern noise for a quiet and serene cabin.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
215/75R15LT	6	100/97S	6.00B	703	216	800/730
215/75R15C	6	100/97S	6.00B	703	216	800/730

CLASSIC CL22

HT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Optimized center block enhances handling stability.
 Reinforced sidewall improves passability on complex roads.
 Cross-zigzag grooves improve wet and dry traction and braking.
 Interlocking tread blocks boost stiffness, grip, and wear resistance.

Size	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
265/70R16	112T	8J	778	272	1120
275/70R16	114T	8J	792	279	1180
265/65R17	112T	8J	776	272	1120
265/70R17	115T	8J	804	272	1215
275/65R17	115T	8J	790	279	1215
285/65R17	116T	8½J	802	292	1250
265/60R18	110T	8J	775	272	1060
285/60R18	116T	8½J	799	292	1250



CLASSIC CL23

LT TIRE

Applicable
Models



Comfort



Noise



Dry



Braking



Wear



Wet



3 deep Longitudinal grooves ensure the tire's hydroplaning performance, handling stability and reduce tire's noise and wear.

Continuous shoulder tibs provide smooth, even tread wear and increased tread life.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
5.00R12C	8	83/81Q	3.50B	568	143	487/462
5.00R12C	10	88/86Q	3.50B	568	143	560/530
145R12C	8	86/84Q	4.00B	542	147	530/500
195R14C	8	106/104Q	5½J	666	198	950/900
195R15C	8	106/104Q	5½J	690	198	950/900
205/70R15C	10	107/103R	6J	669	209	975/875
225/70R15C	10	116/114R	6½J	697	228	1250/1180
195/75R16C	8	107/105R	5½J	698	196	975/925
205/75R16C	10	113/111R	5½J	714	203	1150/1090
215/70R16C	6	108/106R	6½J	708	221	1000/950
215/75R16C	10	116/114R	6J	728	216	1250/1180
225/75R16C	10	118/116R	6J	744	223	1320/1250

CLASSIC CL27

RT TIRE

Applicable Models



Comfort



Noise



Dry



Braking



Wear



Wet



Special grooves enable self-cleaning and stone ejection.

Variable pitch design reduces noise and improves comfort.

Wide block gaps and lateral grooves enhance mud and snow traction.

Optimized structure for stronger load-bearing and off-road performance.

Reinforced shoulders and sidewalls improve obstacle passage and puncture resistance.

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (Kg)
LT265/70R16	10	121/118Q	8J	778	272	1450/1320
LT265/75R16	10	123/120Q	7½J	804	267	1550/1400
LT265/65R17	10	120/117Q	8J	776	272	1400/1285
LT265/70R17	10	121/118Q	8J	804	272	1450/1320

MIX SERIES TIRE




47

PRODUCT PARAMETER MANUAL —>

MIX-200

LT TIRE

Applicable Models   

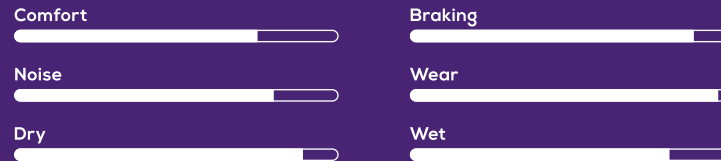

Size	PR	LI/SS	Std. Rim	OD (mm)	SW (mm)	Load (kg)
650R15C	12	108/103N	5.50F	722	188	1000/875
650R16C	12	111/106N	5.50F	747	186	1090/950
700R16C	12	115/110N	5.50F	775	200	1215/1060
750R16C	14	122/118L	6.00G	805	215	1500/1320



WINTER SERIES TIRE

49

PRODUCT PARAMETER MANUAL →

SNOW FORCE

WINTER TIRE

Comfort



Noise



Dry



Braking



Wear



Wet



Assisted groove design strengthens grip, drainage and braking performance. Center consecutive tread pattern design, ensures the stability of straight driving.

Lateral three-dimensional steel disc improves tread elasticity, enhances grip and safe handling performance on ice and snow road.

V-shape groove design improves excellent handling, dry/wet grip, drainage and snow performance.

The three-dimensional steel disc design in the shoulder improves friction between tread and ice road, meanwhile reduces noise. Thus better comfort and safety performance are provided.

SNOW FORCE

Size	Load Index	Speed	SW (mm)	OD (mm)
165/70R13	79	T	177	576
175/70R13	82	T	177	576
155/65R14	75	T	157	558
175/65R14	82	H	177	584
175/70R14	84	T	177	602
185/60R14	82	H	189	578
185/65R14	86	H	189	596
165/55R15	75	H	170	563
165/65R15	81	T	170	595
185/60R15	88XL	T	189	603
185/65R15	92XL	T	189	621
195/55R15	89XL	H	201	595
195/60R15	88	H	201	615
195/65R15	91	H	201	635
205/65R15	94	H	209	647
215/75R15	100	T	216	703
195/55R16	91XL	H	201	620
205/55R16	94XL	H	214	632
205/60R16	96XL	H	209	652
215/55R16	97XL	V	226	642
215/60R16	99XL	H	221	664

Size	Load Index	Speed	SW (mm)	OD (mm)
215/65R16	102XL	H	221	686
235/60R16	104XL	H	240	688
235/70R16	109XL	T	240	736
205/50R17	93XL	V	214	638
215/50R17	95XL	V	226	648
225/50R17	98XL	V	233	658
215/55R17	98XL	V	226	668
215/60R17	100XL	H	221	690
225/45R17	94XL	V	225	634
225/55R17	101XL	V	233	680
225/60R17	99	H	228	702
225/65R17	102	H	228	724
235/45R17	97XL	V	236	644
235/55R17	103XL	V	245	690
235/65R17	108XL	H	240	738
265/65R17	112	H	272	776
215/55R18	99XL	V	226	693
225/40R18	92XL	V	230	637
225/45R18	95XL	V	225	659
225/55R18	98	V	233	705
225/60R18	104XL	H	228	727

SNOW FORCE

Size	Load Index	Speed	SW (mm)	OD (mm)
245/40R18	97XL	V	248	653
235/45R18	98XL	V	236	669
235/50R18	101XL	V	245	693
235/55R18	104XL	V	245	715
235/60R18	107XL	H	240	739
255/40R18	99XL	V	260	661
245/45R18	100XL	V	243	677
245/50R18	104XL	V	253	703
255/55R18	109XL	V	265	737
225/45R19	96XL	V	225	685
235/55R19	105XL	V	245	741

Size	Load Index	Speed	SW (mm)	OD (mm)
245/45R19	98	V	243	703
245/50R19	105XL	V	253	729
245/55R19	103	V	253	753
255/50R19	107XL	V	265	739
275/40R19	101	V	278	703
245/45R20	103XL	V	243	728
255/40R20	101XL	V	260	712
275/45R20	110XL	V	273	756
155/80R14LT 8PR	89/96	T	157	604
195/80R15LT 8PR	102/99	T	196	693

RUN FLAT

Size	LI/SS
225/40RF18	92V
225/45RF18	91V
235/50RF18	101V
235/55RF18	104V
245/40RF18	97V XL

Size	LI/SS
245/45RF18	100V
245/50RF18	100V
255/40RF18	95V
255/55RF18	109V
225/45RF19	96V XL

Size	LI/SS
235/55RF19	105V XL
245/45RF19	98V
245/50RF19	101V
255/50RF19	103V
275/40RF19	101V



SNOW GRIP WINTER TIRE

Comfort



Noise



Dry



Braking



Wear



Wet



4 Angled Wide Grooves: Conquer wet&snowy roads at speed.

Serrated Shoulders: Unlock critical ice & snow traction.

Stable Center Blocks: Brake harder, last longer, handle sharper.


Flexible Silica Compound: Stay grippy when temperatures plunge.

Size	Load Index	Speed	SW (mm)	OD (mm)
175/70R14	88XL	T	177	602
195/60R15	88	H	201	615

Size	Load Index	Speed	SW (mm)	OD (mm)
195/65R15	91	H	201	635

SNOW BEAST

WINTER TIRE

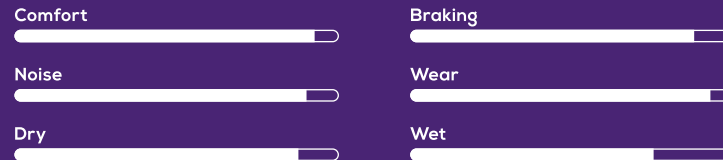

The soft tread compound formula ensures stability and grip on ice and snow surfaces as well as safe handling when driving on snow.

The mainstream pattern system enhances grip on dry and wet surfaces and drainage/snow removal performance.

The reinforced shoulder design provides sidewall protection and gives stronger off-road passability.

Size	Load Index	Speed	SW (mm)	OD (mm)
LT265/70R17	121/118	Q	272	804
LT285/70R17	121/118	Q	299	825
LT315/70R17	121/118	Q	323	874
265/65R18	114	H	272	801
265/55R19	113XL	V	277	775
255/60R19	113XL	H	260	789

Size	Load Index	Speed	SW (mm)	OD (mm)
255/50R20	109XL	V	265	764
265/45R21	108XL	V	266	711
285/45R21	113XL	V	285	789
285/45R22	114XL	V	285	815
275/50R22	111	V	265	814



HANMIX INTERNATIONAL CO., LTD
WWW.HANMIX.NET INFO@HANMIX.NET